


-
-
-
-
-
-
-
-
-
-

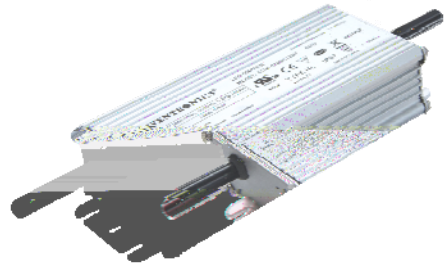

				(1)			
					110Vac	220Vac	
12 V	90 ~ 305 Vac	0~5.00 A	60 W	87%	0.99	0.96	EUV-076S012ST ⁽²⁾
24 V	90 ~ 305 Vac	0~3.17 A	76 W	88%	0.99	0.96	EUV-076S024ST ⁽²⁾
36 V	90 ~ 305 Vac	0~2.11 A	76 W	89%	0.99	0.96	EUV-076S036ST ⁽²⁾
42 V	90 ~ 305 Vac	0~1.81 A	76 W	89%	0.99	0.96	EUV-076S042ST ⁽³⁾
48 V	90 ~ 305 Vac	0~1.58 A	76 W	90%	0.99	0.96	EUV-076S048ST ⁽³⁾
54 V	90 ~ 305 Vac	0~1.41 A	76 W	91%	0.99	0.96	EUV-076S054ST ⁽³⁾

			1 mA	
	-	-	0.9 A	
			0.42 A	
			60 A	
(I ² t)			0.7 A ² s	
	0.9	-	-	100-277Vac, 50-60Hz, 75%-100%负载
	-	-	20%	

	-	-	2% V _O	
			1%	
			2%	
	-	0.8 s	1.2 s	
	-	0.4 s	0.6 s	
	-	-	10%	
	-	-	5% V _O	
	-	-	10 mS	

o

Vo = 12 V	-	18 V	22 V	
Vo = 24 V	-	35 V	40 V	
Vo = 36 V	-	50 V	55 V	
Vo = 42 V	-	58 V	63 V	
Vo = 48 V	-	60 V	65 V	
Vo = 54 V	-	65 V	70 V	
	1.2Io	-	1.5Io	



	-	110 °C	-	

Vo = 12 V	83%	85%	-	°C
Vo = 24 V	84%	86%	-	
Vo = 36 V	85%	87%	-	
Vo = 42 V	85%	87%	-	
Vo = 48 V	85%	87%	-	
Vo = 54 V	86%	88%	-	
Vo = 12 V	85%	87%	-	°C
Vo = 24 V	86%	88%	-	
Vo = 36 V	87%	89%	-	
Vo = 42 V	87%	89%	-	
Vo = 48 V	87%	89%	-	
Vo = 54 V	88%	90%	-	
	-	395,000 hours	-	
	-	51,000 hours	-	
	-40°C	-	88	
	-40 °C	-	+65 °C	
	-40 °C	-	+85 °C	
	-	750 g		

o

UL/CUL	UL8750, UL 1310, CAN/CSA-C22.2 No. 250.13, CAN/CSA-C22.2 No. 223-M91
CE	EN 61347-1, EN 61347-2-13
KS	KS C 7655

EMI	
EN 55015 ⁽¹⁾	Conducted Emission Test & Radiated Emission Test
EN 61000-3-2	Harmonic current emissions
EN 61000-3-3	Voltage fluctuations & flicker
EMS	
EN 61000-4-2	Electrostatic Discharge (ESD): 8 kV air discharge, 4 kV contact discharge

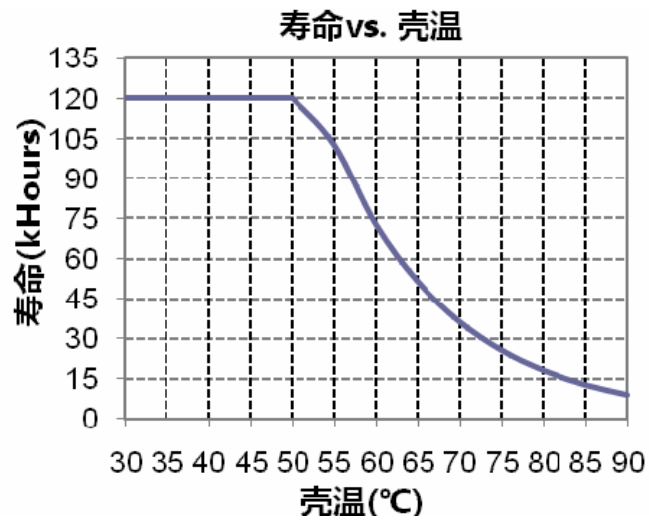

2012-01-28	A			
2012-06-10	B			
2012-7-5	C			
2012-7-12	D			
2013-03-12	E			
2017-06-19	F			
2018-11-21	G			

2018-11-21	G			
2019-12-17	H			
			EN 61000-4-5	
		RoHS		